





SCRH103R

## SMD POWER INDUCTORS





- Features
  1. Magnetically shielded construction
  2. Excellent Power Density
  3. Engineered to Provide High Efficiency



### ELECTRICAL CHARACTERISTICS

Part NumSer	Inductance (uH) (1)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation Current (A) (3)	Temperature Current (A) (4)
SCRH103R-100	10	100KHZ	58m	2.70	2.75
SCRH103R-120	12	100KHZ	72m	2.25	2.48
SCRH103R-150	15	100KHZ	86m	2.22	2.24
SCRH103R-180	18	100KHZ	116m	1.90	2.00
SCRH103R-220	22	100KHZ	145m	1.78	1.80
SCRH103R-270	27	100KHZ	175m	1.63	1.62
SCRH103R-330	33	100KHZ	213m	1.45	1.46
SCRH103R-390	39	100KHZ	268m	1.32	1.32
SCRH103R-470	47	100KHZ	298m	1.18	1.30
SCRH103R-560	56	100KHZ	335m	1.10	1.08
SCRH103R-680	68	100KHZ	451m	1.04	1.00
SCRH103R-820	82	100KHZ	513m	0.94	0.98
SCRH103R-101	100	100KHZ	700m	0.84	0.92
SCRH103R-121	120	100KHZ	765m	0.76	0.88
SCRH103R-151	150	100KHZ	876m	0.70	0.73

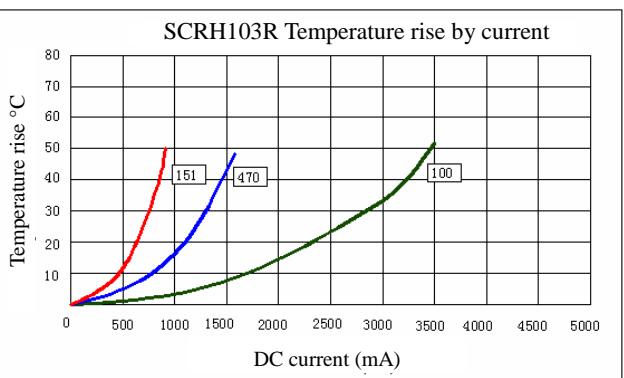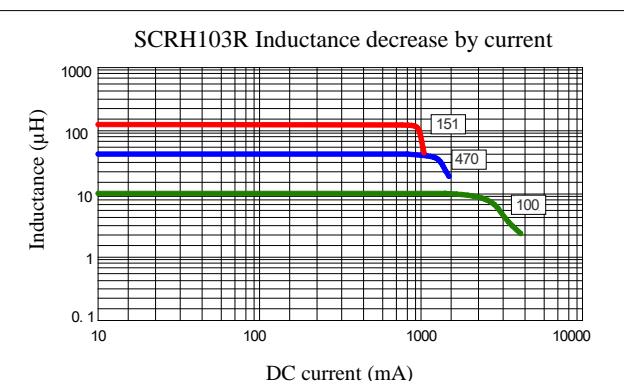

(1). Inductance tolerance  $\pm 30\%$  tested at 0.25V, 0ADC and 25°C

(2). DCR measured at 25°C.

(3). The DC current at which the inductance decreases by 35% from its initial value.

(4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

**Custom versions available upon request.**

©2011 Signal Transformer –Specification subject to change without notice. 07.11

**Signal Transformer**  
[www.signaltransformer.com](http://www.signaltransformer.com)

500 Bayview Avenue, Inwood, NY 11096  
Toll Free 866-239-5777 • Tel 516-239-5777 • Fax 516-239-7208  
[Sales@signaltransformer.com](mailto:Sales@signaltransformer.com) • [techhelp@signaltransformer.com](mailto:techhelp@signaltransformer.com)